Gas Station Complete Solution


Fuel Dispenser


LPG, CNG, LNG Dispenser


EV Charger


Heavy Duty Dispenser


Vapor Recovery System


Gas Station & Convenience Store Management System


Smart Tank Truck Management System


Automatic Tank Gauge System


Skid Filling Station for LPG


Skid Filling Station for Fuel

Double-Wall Tank


Underground Pipeline System

Censtar Science & Technology Corp. Ltd.
Add: Hi-new Technology Industry Development Zone, Zhengzhou City, Henan Province, China
Tel:+86-371-67989006
E-mail: sales@censtar.com
http://www.censtar.com

正星 Censtar

Wechat

Facebook

CS42-Legend

Series Fuel Dispenser

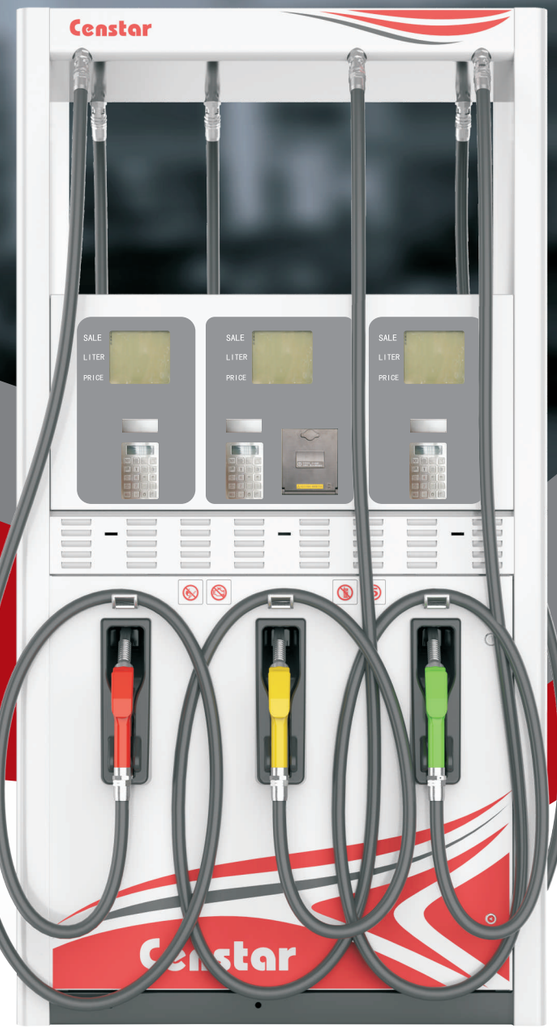

PEI MEMBER · OIML · INTERNATIONAL FORECOURT IFSF STANDARDS FORUM · CE · Ex · F1H2O U.I.M. WORLD CHAMPIONSHIP

HIGH SECURITY SECURED WATERPROOF AND DUSTPROOF

- 6200 Main Board: Latest Electronic Technology, More Safety and Stability
- Intelligent Voice Broadcast System, Printer Bill System, Full-service Customers
- Adjustable Display: Brightness can be adjusted according to the light
- Pos Smart Upgrade Simply Maintenance
- High-precision Flow Meter: Shell use unique technical processing, moistureproof, rustproof, All the advanced design assure outstanding performance no malfunctions within 5,000,000 liters, life-cycle can reach 10,000,000 liters and wide temperature adoption from-40℃-55℃

CS42-Legend Series Fuel Dispenser

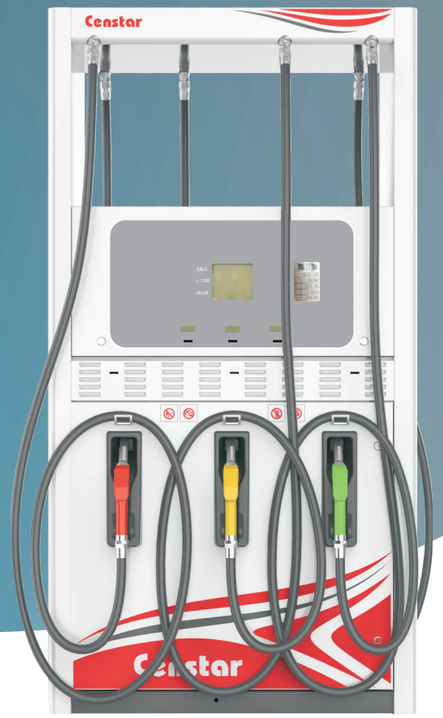

Available Options

- International Solenoid Valve
- International Brand Nozzle
- Breakaway and Swivel
- IC Card Payment Terminal
- English Receipt Printer
- Stainless Steel Arm Side and Canopy

Technical Parameters:

- Accuracy:±0.25%
- Flow Rate Range: 5-50L/Min or 8-80L/Min
- Intake Vacuum:≥54KPA
- Display: sales 0.00 to9999999
- Noise: ≤80dB(A)
- Volume: 0.00 to 99999.99
- Unit Price: 0.00 to 99999 (Decimal point position can be chosen)
- Electrical Totalizer: 0.00 to 99999999.99
- Electrical Mechanical Totalizer: 0.00 to 9999999
- Power Supply: AC380V or AC220V with a changing range from-15% to +10%
- Motor's Output Power: 750W and 1000W
- Working Environmental Temperature: -40°C to+55°C
- Relative Humidity: 30% to 90%

Congfiguration Table (CS42-Legend)

	Pump Type	Nozzle	Oil Product	Display	Flow Rate (L/Min)		
6H 3P	Gear Pump	6	3	6	5-50		
6H 3P		6	3	2	5-50		
6H 3P	Submersible Pump	6	3	6	5-50	8-80	
6H 3P		6	3	2	5-50	8-80	
Net Size:1240*640*2370mm (L*W*H)			Package Size:1280*850*2480mm (L*W*H)				