


# Gas Station Complete Solution





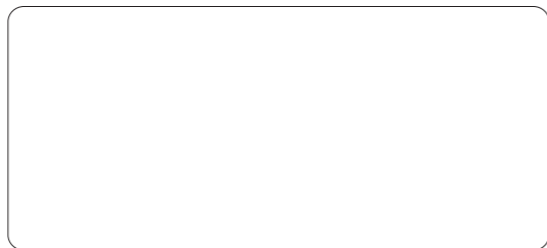


Censtar Science & Technology Corp. Ltd.  
 Add: Hi-new Technology Industry Development  
 Zone, Zhengzhou City, Henan Province, China  
 Tel:+86-371-67989006  
 E-mail: sales@censtar.com  
<http://www.censtar.com>



# S MAN Series Fuel Dispenser



**HIGH SECURITY SECURED**  **WATERPROOF AND DUSTPROOF**

-  6200 Main Board: Latest Electronic Technology, More Safety and Stability
-  Intelligent Voice Broadcast System, Printer Bill System, Full-service Customers
-  Adjustable Display: Brightness can be adjusted according to the light
-  Pos Smart Upgrade Simply Maintenance
-  High-precision Flow Meter: Shell use unique technical processing, moistureproof, rustproof, All the advanced design assure outstanding performance no malfunctions within 5,000,000 liters, life-cycle can reach 10,000,000 liters and wide temperature adoption from -40°C-55°C

## Available Options

- International Solenoid Valve
- International Brand Nozzle
- Breakaway and Swivel
- IC Card Payment Terminal
- English Receipt Printer
- Stainless Steel Arm Side and Canopy



## Technical Parameters:

- Accuracy: ±0.25%
- Flow Rate Range: 5-50L/Min or 8-80L/Min
- Intake Vacuum: ≥54KPA
- Display: sales 0.00 to 99999999
- Noise: ≤80dB(A)
- Volume: 0.00 to 99999.99
- Unit Price: 0.00 to 99999 (Decimal point position can be chosen)
- Electrical Totalizer: 0.00 to 99999999.99
- Electrical Mechanical Totalizer: 0.00 to 99999999
- Power Supply: AC380V or AC220V with a changing range from -15% to +10%
- Motor's Output Power: 750W and 1000W
- Working Environmental Temperature: -40°C to +55°C
- Relative Humidity: 30% to 90%

## S MAN Series Fuel Dispenser



## Configuration Table (S MAN)

	Pump Type	Nozzle	Oil Product	Display	Flow Rate (L/Min)		
					5-50	8-80	120
1H 1P	Gear Pump	1	1	1	5-50	8-80	120
2H 1P		2	1	2	5-50		
2H 2P		2	2	2	5-50	8-80	
1H 1P	Submersible Pump	1	1	1	5-50	8-80	120
2H 1P		2	1	2	5-50	8-80	
2H 2P		2	2	2	5-50	8-80	
Net Size: 1038*500*1579 mm (L*W*H)			Package Size: 1085*520*1760mm (L*W*H)				